


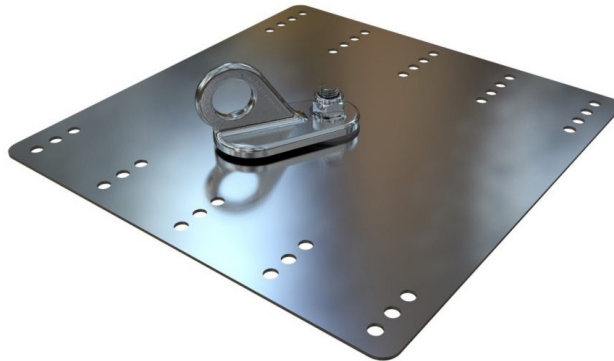

MAXIFIT 360° SURFACE MOUNT ANCHOR

The System

MaxiFit 360° is a top fixed fall arrest anchor point designed for easy installation into Lysaght Spandek roof sheet. The pre-drilled base plate provides for a quick installation while the swivelling eyebolt ensures uniform loading to all sides.

Special Features:

- ✓ Heavy duty swivel eye AA406
- ✓ Quick and easy installation
- ✓ Suitable for both steel and timber structures
- ✓ 3mm thickness version suitable for abseil and fall arrest use

Uses:

Designed for abseiling and to support a fall arrest load of 15 kN in any direction (always in sheer) provided a suitable personal shock absorber is used.

Installation by trained and certified personnel in accordance with AS/NZS 1891.4:2025, AS/NZS 5532:2025, ISO 22846 (2020) and manufacturer's instructions.

Product Warranty:

10 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

Important Note:

Failure to supply and/or install proprietary product in accordance with above standards and codes, specifications and instructions voids complete system certification and/or warranty.

Technical Data

Material Used:

Base plate: 3mm grade 316 stainless steel
Swivel anchor: Investment cast 316 Stainless Steel

Finish:

Base plate: 2B stainless steel (can be powder coated)
Swivel anchor AA406: Electro polish

Ultimate Load:

Abseil: 15 kN
Fall Arrest: 15 kN

Dimensions:

- ✓ Size of plate – 337mm x 347mm
- ✓ Eye Diameter – 25 mm
- ✓ Weight – 3,040 grams

Fixing Details:

- ✓ Timber rafter/ batten – min 70mm x 35mm
- ✓ Steel Purlin – min gauge 150 x 1.2 mm, 50mm x 100mm
- ✓ Roof Sheet – min gauge 0.42mm
- ✓ LYSAGHT TOPSPAN® 40 top hat, 550MPa min yield

Installation and Maintenance:

Installation and certification required by competent person at intervals not exceeding 12 months as specified in AS 1891.4:2025, and ISO 22846 (2020).

Standards:

AS/NZS 1891.4:2025, AS/NZS 5532:2025
ISO 22846 (2020)