


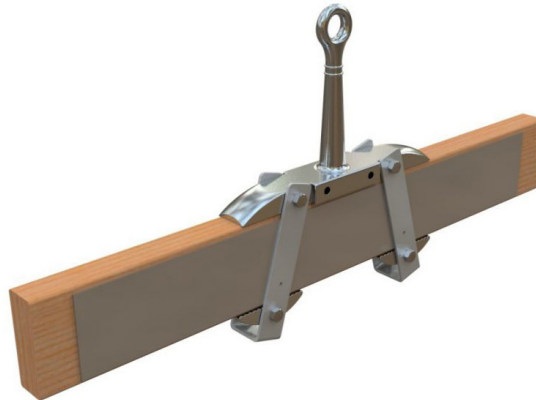

TRUSS-T-GRIP® ROPE ACCESS & FALL ARREST ANCHOR POINT AUSTRALIAN PATENT 744587

The System

Truss-T-Grip® is a rope access and fall arrest anchor point designed for use on timber members such as trusses and rafters. It doesn't rely on penetration of timber members by screws or any other means of their modification. Instead, it utilises a unique clamping mechanism which compresses the timber rather than splitting it in the event of arresting a fall. It comes complete with 2 stainless steel truss armour plates. Waterproofing is achieved by Flexatite product sold separately.

Truss-T-Grip® is stocked in 3 most common truss/ rafter sizes: TG9035 (fits trusses 90mm x 30mm), TG10050 and TG20050 but it can be made to suit any truss/ rafter size.

Special Features:

- ✓ Compression clamp mechanism
- ✓ Easy installation and removal
- ✓ Can be used as a temporary anchor
- ✓ Fits all standard truss and rafter sizes

Uses:

Designed for industrial rope access (abseiling) and to support a fall arrest load of 15 kN in any direction provided a suitable personal shock absorber is used.

Installation by trained and certified personnel in accordance with AS/NZS AS/NZS 1891.4:2025, ISO 22846 (2020) and manufacturer's instructions.

Technical Data

Material Used:

Investment cast grade 316 Stainless Steel

Finish:

Electro polish

Ultimate Load:

Rope access: 15 kN

Fall arrest: 15 kN

Dimensions:

- ✓ Height – 180 mm
- ✓ Eye Diameter – 22 mm

Weight:

- ✓ TG9035 - 2,725 g
- ✓ TG10050 - 3,160 g
- ✓ TG20050 - 3,175 g

Fixing Details:

Timber truss or rafter – min 90mm x 35mm

Maintenance:

Inspection required by competent person at intervals not exceeding 12 months as specified in 1891.4:2025, and ISO 22846 (2020).

Standards:

Complies with WHS Act 2011 and relevant Codes of Practice.
Australian Standard – AS/NZS 1891.4:2025, AS/NZS 5532:2025
ISO 22846 (2020)